


1. Features

- Ultra-Low capacitance:0.05pF(typ.)
- Low leakage current(<10nA)
- Fast response time(<1ns)
- Bi-directional, single line protection
- IEC 61000-4-2 (ESD Air): 15kV
IEC 61000-4-2 (ESD Contact): 8kV


2. Pin Description

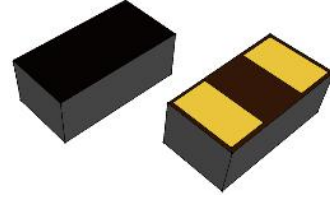

3. Applications

- USB 3.0/3.1
- HDMI 1.3/1.4/2.0
- RF Antenna
- SATA and eSATA Interface

4. Schematic Diagram



5. Order Information

| Type | Package | Size (mm) | Delivery Form | Delivery Quantity |
|-------------|---------|----------------|---------------|-------------------|
| SCP0402MS05 | 0402 | 1.00x0.52x0.38 | 7" T&R | 10,000 |

6. Limiting Values($T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)

| Symbol | Parameter | Conditions | Min | Max | Unit |
|-----------|---------------------------------|----------------------------------|-----|-----|--------------------|
| V_{ESD} | Electrostatic Discharge Voltage | IEC 61000-4-2; Contact Discharge | - | 8 | kV |
| | | IEC 61000-4-2; Air Discharge | - | 15 | kV |
| T_A | Operating Temperature Range | - | -55 | 125 | $^{\circ}\text{C}$ |
| T_{stg} | Storage Temperature Range | - | -40 | 85 | $^{\circ}\text{C}$ |

7. Electrical Characteristics($T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

| Symbol | Parameter | Conditions | Min | Typ. | Max | Unit |
|----------|------------------------------|-------------------------------------|-----|------|-----|------|
| V_{DC} | Continuous Operating Voltage | - | - | - | 5.0 | V |
| V_T | Trigger Voltage | IEC61000-4-2 8kV contact discharge | - | 450 | - | V |
| V_C | Clamping Voltage | IEC61000-4-2 8kV contact discharge | - | 40 | - | V |
| I_L | Leakage Current | DC 5V shall be applied on component | - | - | 10 | nA |
| C_J | Capacitance | Measured at 10MHz | - | 0.05 | - | pF |

8. Typical Characteristics

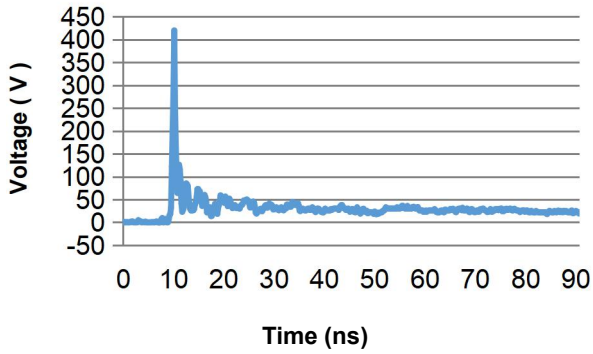


Fig.1 Typical ESD Response
(IEC 61000-4-2, 8kV contact discharge)

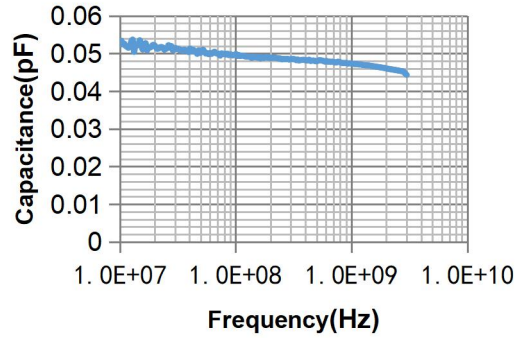


Fig.2 Typical Device Capacitance VS. Frequency



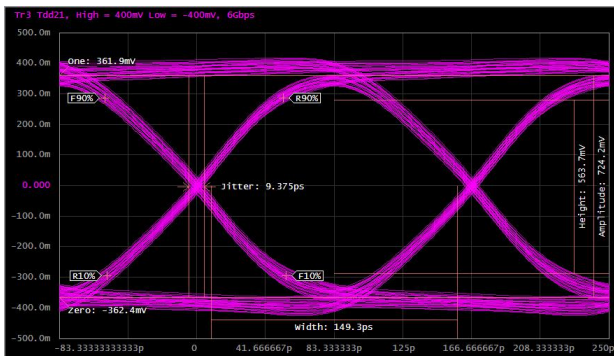


Fig.3 HDMI 2.0 Mask at 6.0 Gbps


9. ESD Protection for Signal Line

The SCP is designed for the protection of one bidirectional data line from ESD damage.


- Place the SCP as close to the input terminal or connector as possible.
- Minimize the path length between the SCP and the protected signal line.
- Use ground planes whenever possible.

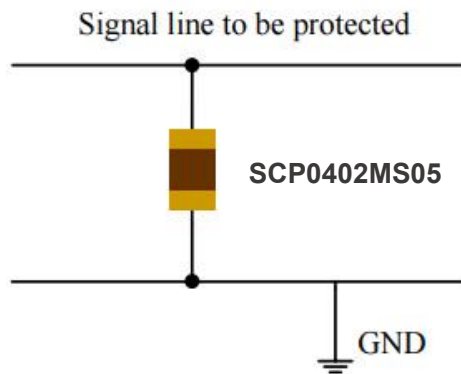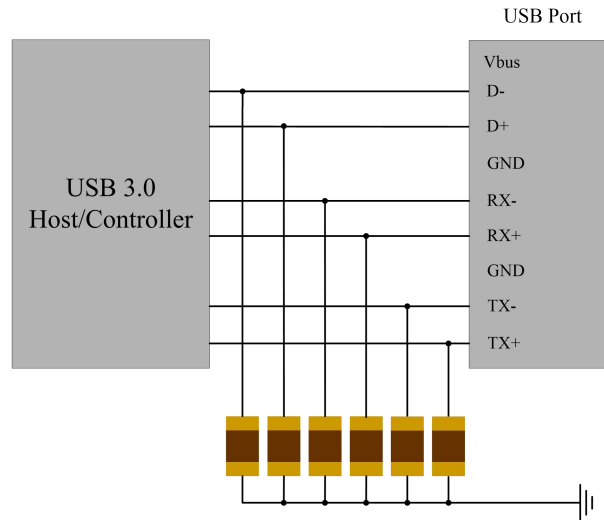

10. Package Dimension

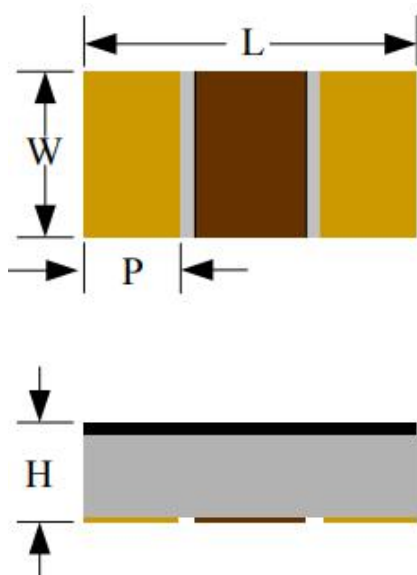

Recommended Solder Pad Footprint

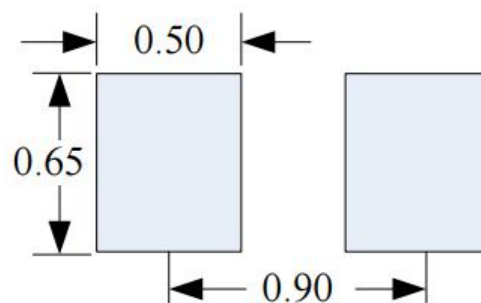


***Sizes in mm**

Notes:

This solder pad layout is for reference purposes only.

| Dimension | Unit: Millimeters | |
|-----------|-------------------|------|
| | Min. | Max. |
| L | 0.90 | 1.10 |
| W | 0.42 | 0.62 |
| p | 0.15 | 0.35 |
| H | 0.25 | 0.45 |

11. Soldering Parameters

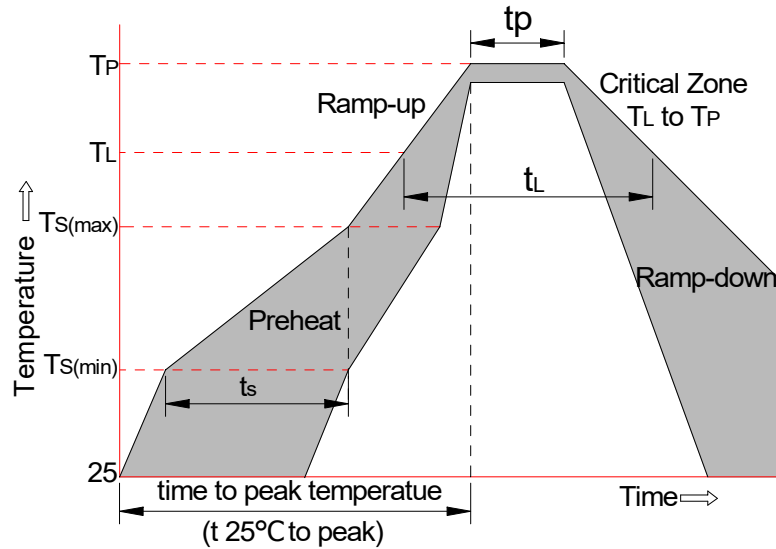

| Reflow Condition | | Pb-Free Assembly |
|---|-----------------------------------|------------------|
| Pre-heat | -Temperature Min ($T_{s(min)}$) | +150°C |
| | -Temperature Max($T_{s(max)}$) | +200°C |
| | -Time (Min to Max) (t_s) | 60-180 secs. |
| Average ramp up rate (Liquid us Temp (T_L) to peak) | | 3°C/sec. Max |
| $T_{s(max)}$ to T_L - Ramp-up Rate | | 3°C/sec. Max |
| Reflow | -Temperature(T_L)(Liquid us) | +217°C |
| | -Temperature(t_L) | 60-150 secs. |
| Peak Temp (T_p) | | +260(+0/-5)°C |
| Time within 5°C of actual Peak Temp (t_p) | | 30 secs. Max |
| Ramp-down Rate | | 6°C/sec. Max |
| xTime 25°C to Peak Temp (T_P) | | 8 min. Max |
| Do not exceed | | +260°C |

12. Contact Information

Buy our products or get free samples, for further information and requests,

e-mail us at: evan@howetim.com

13. Copyrights & Disclaimer

Copyright SONGCHEN, trademarks Registered. All rights reserved. The material herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner.

Devices sold by SONGCHEN are covered by the warranty and patent indemnification provisions appearing in its General Terms of Trade. SONGCHEN makes no warranty, express, statutory, implied, or by description regarding the information set forth herein.

SONGCHEN reserves the right to change specifications and prices at any time and without notice. Therefore, prior to designing this product into a system, it is necessary to check with SONGCHEN for current information.

This product is intended for use in commercial applications.

Applications requiring extended temperature range, unusual environmental requirements, or high reliability applications, such as military, medical life-support or life-sustaining equipment are specifically not recommended without additional processing by SONGCHEN for each application.

This product is provided by SONGCHEN "AS IS" and any express or implied warranties, including, but not limited to th implied warranties of merchantability and fitness for a particular purpose are disclaimed.

SONGCHEN shall not be liable to recipient or any third party for any damages, including but not limited to personal injury, property damage, loss of profits, loss of use, interruption of business or indirect, special, incidental or consequential damages, of any kind, in connection with or arising out of the furnishing, performance or use of the technical data herein. No obligation or liability to recipient or any third party shall arise or flow out of SONGCHEN rendering of technical or other services.

14. Reversion History

| Document ID | Release Date | Sheet Status | Change Notice | Supersedes |
|-------------|--------------|--------------------|---------------|------------|
| 0.1 | 08-Mar-2018 | Product data sheet | - | - |